



Advanced Instruments Inc.


Gas analysis solutions through advanced analyzer and sensor technology

Technical Specifications

Accuracy:	< 1% of FS range under constant conditions
Analysis:	0-5%, 0-25% FS ranges
Application:	Oxygen analysis from 0.05% to 100% in inert, helium, hydrogen, mixed and acid (CO ₂) gas streams
Approvals:	CE, manufacturer's explosion proof certifications applicable to enclosure, flame arrestors and fabrication
Area Classification:	Class 1, Division 1, Groups C, D hazardous areas
Alarms:	None
Calibration:	Certified gas of O ₂ balance N ₂ approximating 80% of analysis range recommended for optimum results.
Compensation:	Temperature compensated
Connections:	1/8" compression tube fittings
Controls:	Integral 4-20mA zero and span pots, and, range selector
Display:	LCD 3-1/2 digits; resolution 0.01%
Enclosures:	Painted aluminum explosion proof NEMA 4X wall mount with flame arrestors certified for Class 1, Division 1, Groups C, D; 12"x8"x10"; 15 lbs
Flow Sensitivity:	None between 0.5-5 SCFH, 2 SCFH recommended
Linearity:	> .995 over all ranges
Pressure:	Inlet - regulate to 5-30 psig; vent - atmospheric
Power:	12-28VDC two wire loop power
Response Time:	90% of final FS reading in 15 seconds
Sample System:	None; optional H ₂ S sample system(s) for natural gas extraction, transmission and processing
Sensitivity:	< 0.5% of FS range
Sensor Model:	XLT-11-24-RTS with > 0.5% CO ₂ present - no maintenance
Sensor Life:	24 months at 25°C and 1 atm
Signal Output:	4-20mA
Temp. Range:	-20° to 45°C (XLT sensor); -10° to 45°C (GPR sensor),
Warranty:	12 months analyzer; 12 months sensor
Wetted Parts:	Stainless steel

Optional Equipment

GPR-11-32-RTS sensor for gas streams without CO₂ present (36 month life)
 Sample conditioning accessories (see illustration above) - contact factory

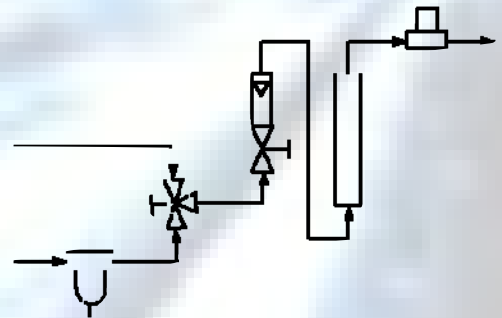

Optional H₂S Scrubber System Diagram (P/N A-3237, B-2748)

GPR-25 XP **Explosion Proof** **2 Wire Loop Powered** **Oxygen Transmitter**

Approved for use in Class 1, Division 1,
 Group C, D Hazardous Areas
 Tailored for Natural Gas Applications &
 Outdoor Battery Powered Installations
 Advanced Sensor Technology
 Accuracy < 1% FS Range
 24 Month Life
 No Maintenance
 Compatible in 0-100% CO₂
 Extended Temperature Range
 4-20mA or 1-5V Signal Outputs
 2 Standard Ranges
 ISO 9001:2000 Approved QA System

